

MicroFlow II Ductless Workstation

The MicroFlow II Workstation ideal for: A class 1 ductless hood workstation. Equipped with Activated Carbon filtration, for fumes, odors, non-hazardous chemical vapors and pre-filter for particulate filtration.




- Completely self contained with clear hood surround with safety viewing sash for user.
- Clear hood surround with safety viewing sash allows visibility from 3 sides, and provides both safety and access to inside work area. Sash can be conformed for use with a microscope.
- Integral work surface dished to contain spills.
- Variable speed fan control. High speed 100fpm to Low speed minimum air flow for sensitive operations.
- Operates on 115V AC / 60Hz, or 230V AC / 50Hz International, Conforms to UL, CSA, & CE requirements.
- 6' Electrical cord connects and disconnects at left rear side exits left side.
- Easy change out of used filter. Recommend filter change every 60-90 days. Filter life varies with usage.

Typical Applications:


- General chemistry involving small volumes of common chemicals, Individual Work stations
- Tissue staining and processing
- Gluing & Drying operations
- Solvent cleaning of electronic parts
- Soldering fumes and odors
- School demonstration workstations
- Containment of Forensic applications



Rule: hazardous chemicals require use of gloves & safety glasses

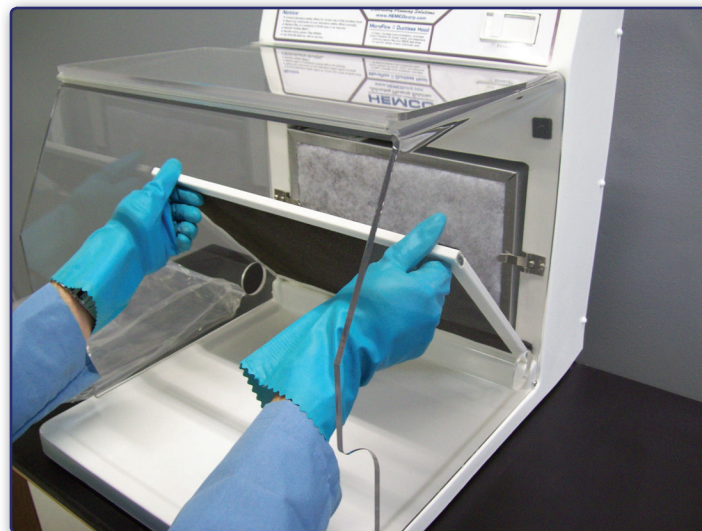

Replacement of pre-filter on Micro Flow II

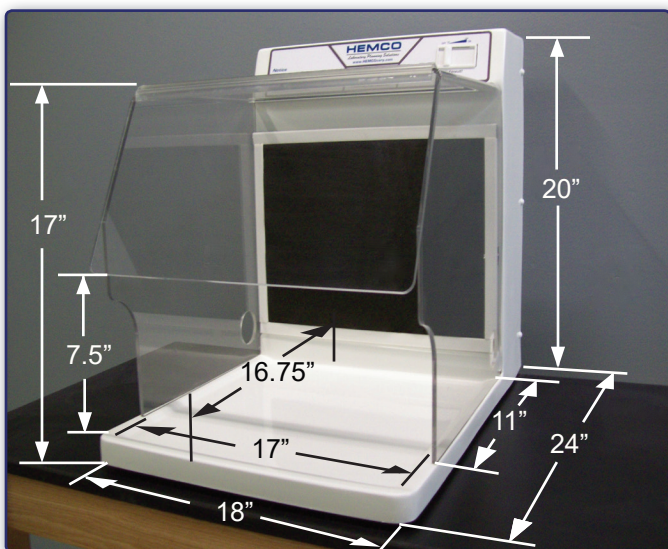

Specifications:

1. MicroFlow II Ductless Workstation
Model # 64010
2. Replacement Carbon Filter Model # 52004
3. Replacement Prefilter Model # 64011

Visit www.HEMCOcorp.com

HEMCO Corporation
711 S. Powell Road
Independence, MO 64056

HEMCO
Lab Planning Solutions

Phone (816) 796-2900
Fax (816) 796-3333
MFII-04.18