


AMC Portable Leak Detection System

For HF, HCl, NH₃ and H₂S analyzers

PICARRO

- Simultaneous, continuous flush sequencer module provides very fast sample point scanning cycles
- Optimized performance for Picarro SI2000 analyzers
- Fully user-programmable leak search mode
- Configurable for 8 or 16 sample ports
- 1 hour backup Uninterruptible Power Supply
- Recovery from PPM level leak events to normal cleanroom levels in just minutes

The **Picarro AMC Portable Leak Detection System** utilizes one or two 8-port sequencer modules to mobilize Picarro gas analyzers for fast detection and confirmation of contamination events. The Portable System has been designed to optimize response time in the presence of reactive gases with the lowest memory retention in the valves, connectors, sample lines and sequencer components. The Sample Sequencer Module utilizes a SilcoNert-coated mass flow controller and a fast flow, high volume vacuum pump to quickly draw samples up to 50 meters away. Our robust and reliable components assure the best performing AMC Leak Detection System with our Picarro SI2000 Series analyzers.

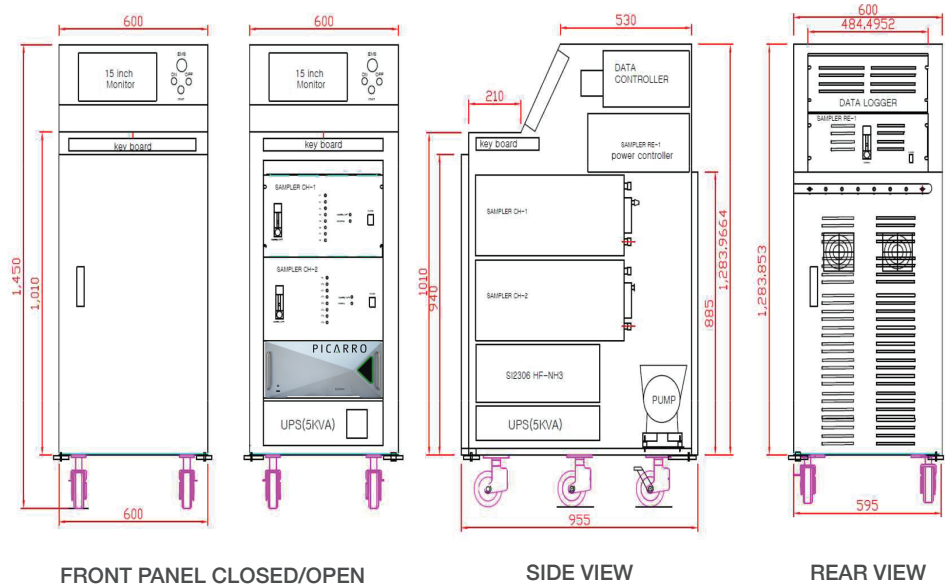

Continuously monitor up to 16 sampling points for real-time airborne molecular contamination event confirmation!

Picarro Sample System Status Screen

The screenshot displays the Picarro Sample System Status Screen. At the top, the 'PICARRO' logo is on the left, and the date and time '2018-01-05 14:20:27' are on the right. The main data table is organized into columns for different models: Model [SI2108], Model [SI2306], and Model [SI2307]. Each model has sub-columns for H2O, HF, NH3, H2S, and Press, with units like ppb, ppm, Torr, and °C. The table lists 16 sample lines, with the first line ([CH-1] Port.01-08) highlighted in green. Overlaid on the right side are three windows: 'Line Information', 'PLC Program - Set Up', and 'Leak Search Schedule'. The 'Leak Search Schedule' window shows a grid for 14 ports, with columns for 'Start', 'Active', 'Sampling time', and 'Waiting time'. At the bottom, there are flow control panels for [CH-1] Port01 ~ 08 and [CH-2] Port09 ~ 16, each with 'Auto control' and 'Current Data' fields.

AMC Leak Detection and Monitoring System Software

User-selectable default and customizable programs are available for setting multiple sample point scanning and search modes. Default sample point cycle times are recommended at approximately 30 seconds each but the Sequencer Module can be set to scan through each 8-port module at two to three times this rate or faster, if required. User-programmed scenarios can also be programmed to optimize the locations of leak events, or for monitoring the leak size over time (from low level PPT concentrations into the PPB levels), and for monitoring the potential leaks over as many as 16 sample points simultaneously. Both automatic and manual modes are available for leak search schemes. Preventive maintenance cleaning cycles can be programmed on a periodic basis and System Status screens will easily indicate each sample point composition and unique pressure & temperature readings. With the high flow, continuous flush design of each Sequencer module and proper annual sample line maintenance, frequent or excessive flushing of long distance sample lines should never be necessary - even after a significantly high concentration gas leak event in the PPM concentration levels.

A0316 Sample System Specification		
Model Numbers	A0316-08	A0316-16
Power Consumption	300 W	500 W
Power Requirements	100-110 V, 220-240 V, 50/60 Hz	
Uninterruptable Power Supply	5kVA Supplied, 1 hour backup	
Sampling Line	3/8" PFA	
Dimensions	23.6" W x 37.6" D x 57" H (60 x 95.5 x 145 cm)	
Weight	396 lbs. (181 kg)	
Sample Pump Max. Flow Rate	60 liter/min	
Operating Conditions	5-40°C	
Ambient Humidity	<99% RH non-condensing	