

2310-1 Remote Airborne Particle Counter 1.0 CFM (28.3 LPM)


The Particles Plus 2310-1 Remote Particle Counter measures 0.3 μm and 0.5 μm with a flow rate of 1.0 CFM (28.3 LPM). Integration is easy into a real-time monitoring or building management system via Modbus™ RTU or ASCII. The 2000 Series is the smallest remote particle counter on the market and has easy mounting options. The Particles Plus 2310-1 complies with ISO 21501-4 and includes a 2 year limited warranty

Features and Benefits

- 2310-1: Measures 0.3 μm and 0.5 μm
- 1.0 CFM (28.3 LPM) flow rate with onboard pressure loss alarm
- Long life laser diode technology
- World's smallest 1 CFM remote particle counter
- Measures 2 channels of simultaneous data.
- MODBUS™ RTU or ASCII Outputs
- Connect using RS485 or RS232
- Concentration limit of 500,000 per ft^3
- LED Status Indication
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamless integration into a facility monitoring system
- Light weight stainless steel enclosure
- 2 year warranty. Extended warranties available

Specifications

Model	2310-1
Channel Sizes	0.3 μm and 0.5 μm
Counting Efficiency	50% at 0.3 μm ; 100% for particles > 0.45 μm (per JIS)
Concentration Limits	500,000 particles / ft^3 at 5% coincidence loss
Light Source	Long life laser diode
Zero Count Level	<1 count / 5 minutes (per JIS B9921)
Flow Rate	1.0 CFM (28.3 LPM)
Flow Control	Critical orifice
Vacuum Requirements	External vacuum >15" (38.1 cm) of Hg Calibration NIST Traceable
Sample Probe/Tubing	Isokinetic sampling probe
Communication Interface	Modbus™ RTU or ASCII outputs (specified upon order)
Power	9-30VDC
Dimensions (L x W x H)	1.8" x 3.7" x 1.5" (4.5 cm x 9.3 cm x 3.8 cm) does not include probe
Weight	0.62 lb (0.28 kg)
Standards	ISO 21501-4 and JIS B9921
Warranty	2 year limited warranty
Operating Conditions	5° to 35°C 20% to 95%RH non-condensing
Storage Conditions	-20° to 50°C Up to 98%RH non-condensing
Optional Accessories	Isokinetic sampling probe, purge filter, data cable, vacuum and sample tubing

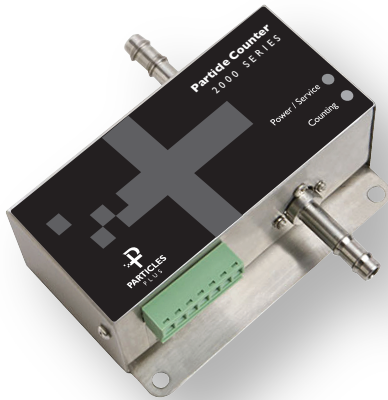

2310-4 Remote Airborne Particle Counter 1.0 CFM (28.3 LPM)

The Particles Plus 2310-4 Remote Particle Counter measures 0.3 μm , 0.5 μm , 1.0 μm & 5.0 μm with a flow rate of 1.0 CFM (28.3 LPM). Integration is easy into a real-time monitoring or building management system via Modbus™ RTU or ASCII. The 2000 Series is the smallest remote particle counter on the market and has easy mounting options. The Particles Plus 2310-4 complies with ISO 21501-4 and includes a 2 year limited warranty

Features and Benefits

2310-4: Measures 0.3 μm , 0.5 μm , 1.0 μm & 5.0 μm

- 1.0 CFM (28.3 LPM) flow rate with onboard pressure loss alarm
- Long life laser diode technology
- World's smallest 1 CFM remote particle counter
- Measures 4 channels of simultaneous data.
- MODBUS™ RTU or ASCII Outputs
- Connect using RS485 or RS232
- Concentration limit of 500,000 per ft^3
- LED Status Indication
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamless integration into a facility monitoring system
- Light weight stainless steel enclosure
- 2 year warranty. Extended warranties available

Specifications

Model	2310-4
Channel Sizes	0.3 μm , 0.5 μm , 1.0 μm & 5.0 μm
Counting Efficiency	50% at 0.3 μm ; 100% for particles > 0.45 μm (per JIS)
Concentration Limits	500,000 particles / ft^3 at 5% coincidence loss
Light Source	Long life laser diode
Zero Count Level	<1 count / 5 minutes (per JIS B9921)
Flow Rate	1.0 CFM (28.3 LPM)
Flow Control	Critical orifice
Vacuum Requirements	External vacuum >15" (38.1 cm) of Hg Calibration NIST Traceable
Sample Probe/Tubing	Isokinetic sampling probe
Communication Interface	Modbus™ RTU or ASCII outputs (specified upon order)
Power	9-30VDC
Dimensions (L x W x H)	1.8" x 3.7" x 1.5" (4.5 cm x 9.3 cm x 3.8 cm) does not include probe
Weight	0.62 lb (0.28 kg)
Standards	ISO 21501-4 and JIS B9921
Warranty	2 year limited warranty
Operating Conditions	5° to 35°C 20% to 95%RH non-condensing
Storage Conditions	-20° to 50°C Up to 98%RH non-condensing
Optional Accessories	Isokinetic sampling probe, purge filter, data cable, vacuum and sample tubing